


## EM500 VENEER MORTAR

### General Product Description

EZYMIX Veneer Mortar is a graded sand, cement and additive, dry mixed product for use as a Clay and Concrete Masonry Veneer for Residential and Commercial applications.

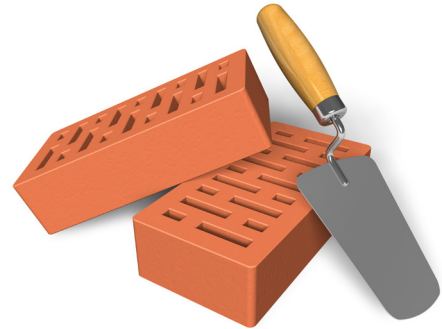

### Product Info and Limitations

EZYMIX Structural Mortar material consists of:

- 3 parts by volume of dried graded sand, to comply with NZS 3103
- 1 Part by volume General Purpose Portland Cement complying with NZS 3122, 3123 or 3125.
- Percentage of property enhancing additives in conjunction with NZS 3113.

The compressive strength of EZYMIX Veneer Mortar complies with Published BRANZ Report SR 258 (2011) Critical Properties of Mortar for good Seismic Performance of Brick Veneer.

EZYMIX Veneer Mortar requires **12% water (3l / 25kg bag)** added or as required to achieve a workable consistency.

### Product Yield

Approx. Yield Per 25kg Bag	70 Series			90 Series
	70x76x230	70x162x290	70x119x230	90x76x230
Brick Veneer Dimensions (D X H X W)				
No. of blocks per 25kg bag	33 - 39	36-40	43-49	30-33
Approx. m2 per 25kg bag 1.7m2	0.65m2	1.8m2	1.27m2	1.6m2



Quality Construction Solutions

## Manufacturing Quality Control

EZYMIX Veneer Mortar is manufactured to specification in New Zealand by Nu-Age Plaster Ltd utilising automated weighing and batching equipment in conjunction with Telarc Q Base a strict quality control regime. The manufacture of this product is guaranteed.

## Product Guarantee

EZYMIX Veneer Mortar is Guaranteed to be manufactured to consistent specification or replacement material will be supplied.

EZYMIX cannot be held liable for the application of the material outside the specifications stated in this and other associated Technical Literature, for application which does not meet current Trade Practices and any application prior to consultation on use with EZYMIX staff.

## Handling and Storage

The material must be kept dry and sealed, stored off the floor in a manner where moisture cannot come into contact with the bag or its contents.

This Product has a shelf life of 12 months after date of manufacture if stored as detailed above. Manufactured dates are clearly labelled on each bag.

Please refer to product Safety Data Sheet prior to use and always wear Protective Personal Equipment.

## Additional Data

EZYMIX Veneer Mortar loves to be mixed using automated on-site mixing equipment. The D-20 mixer adds the perfect amount of water and mixing time to ensure consistent mixes time after time. If you would like information regarding to the D-20 mixing machine please contact EZYMIX.

All cementitious products are susceptible to efflorescence. This condition does not affect the physical properties of the product.