

NON ADHESIVE (NA) FLOOR SLEEVE

Fleece-coated floor sleeve for a permanent sealing of pipe passages in combination with sealing systems under tiles.

Properties

The NA Floor Sleeve is watertight & permanently sealing. The sleeve is made of polyethylene foil reinforced with on both sides with non-woven and a flexible zone based on NBR rubber in the middle. This material basis causes an excellent bonding with the EM240 (IWM) Internal Waterproofing Membrane used under tiles extending over the entire surface of the sleeve.

Field of application

The NA Floor Sleeve is suitable as permanently watertight sealing on wall areas for pipe passages of shower and bathtub water fittings under ceramic coverings. The sleeve is completely embedded into the EM240 IWM.

Technical specifications:


Total measurements	350 x 350 mm
Thickness	0.4mm

NA Floor Sleeve Installation

Using a small roller, trowel or brush apply an even layer of EM240 IWM to an area slightly larger than the size of the NA Floor Sleeve around the waste.

The NA Floor Sleeve is put over the waste and pushed evenly into the wet EM240 IWM. Carefully remove any excess EM240 IWM to minimize creasing & eliminate ridges.

Once all NA Sealing Tapes have been installed apply an even coat of EM240 IWM overtop of all the sealing tapes including the internal & external corners, wall & floor sleeves. Carefully remove any excess edges / ridges.

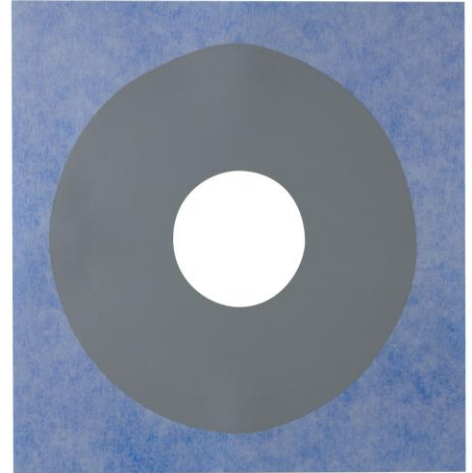

Cleaning of tools and equipment

Tools and soiled areas should be cleaned immediately after use with water.

Storage

Can be stored in the original sealed packaging for up to 24 months in a cool, dry environment.

Logistics

5 pieces/ carton

Safety information

This product is not hazardous as defined in the Hazardous Substances Code.

Disposal

May be disposed of as construction waste.